

SRD-30 DC FUSE



PRODUCT ADVANTAGES

- Switch status is visually verified via indicators.
- Pluggable, easy core replacement.
- V0 flame-retardant case.
- Photovoltaic-specific.
- Current-carrying parts are made of copper.
- DIN rail mounting.
- With short circuit and overload protection.

PRODUCT ADVANTAGES

This series of fused switch-disconnector is a fuse holder specifically designed for the photovoltaic industry. This series of products can incorporate fuses and is used for overcurrent protection in main circuits and equipment with a rated voltage not exceeding DC 1000V, a rated current not exceeding 30A, and a rated short-circuit capacity not exceeding 30kA. Mainly used in energy storage systems, solar photovoltaic combiner boxes, as short circuit and overload protection for solar photovoltaic power generation devices, batteries and other semiconductor equipment.


NORMAL USE AND INSTALLATION CONDITIONS

- Operating temperature -5C~+40 C.
- Altitude:≤2,000m.
- Pollution degree: Level 3.
- Installation category:Class II, Class III.
- Installation method: Installed on the standard guide rail, the standard guide rail should meet the requirements of TH35-7.5 type in JB6525-1992.
- The product should generally be installed vertically, and there should be no significant shock and vibration at the installation place.

GENERAL PARAMETERS

S	RD	30
Enterprise Code	Design Number	Frame Rated Current

DIMENSION (MM)

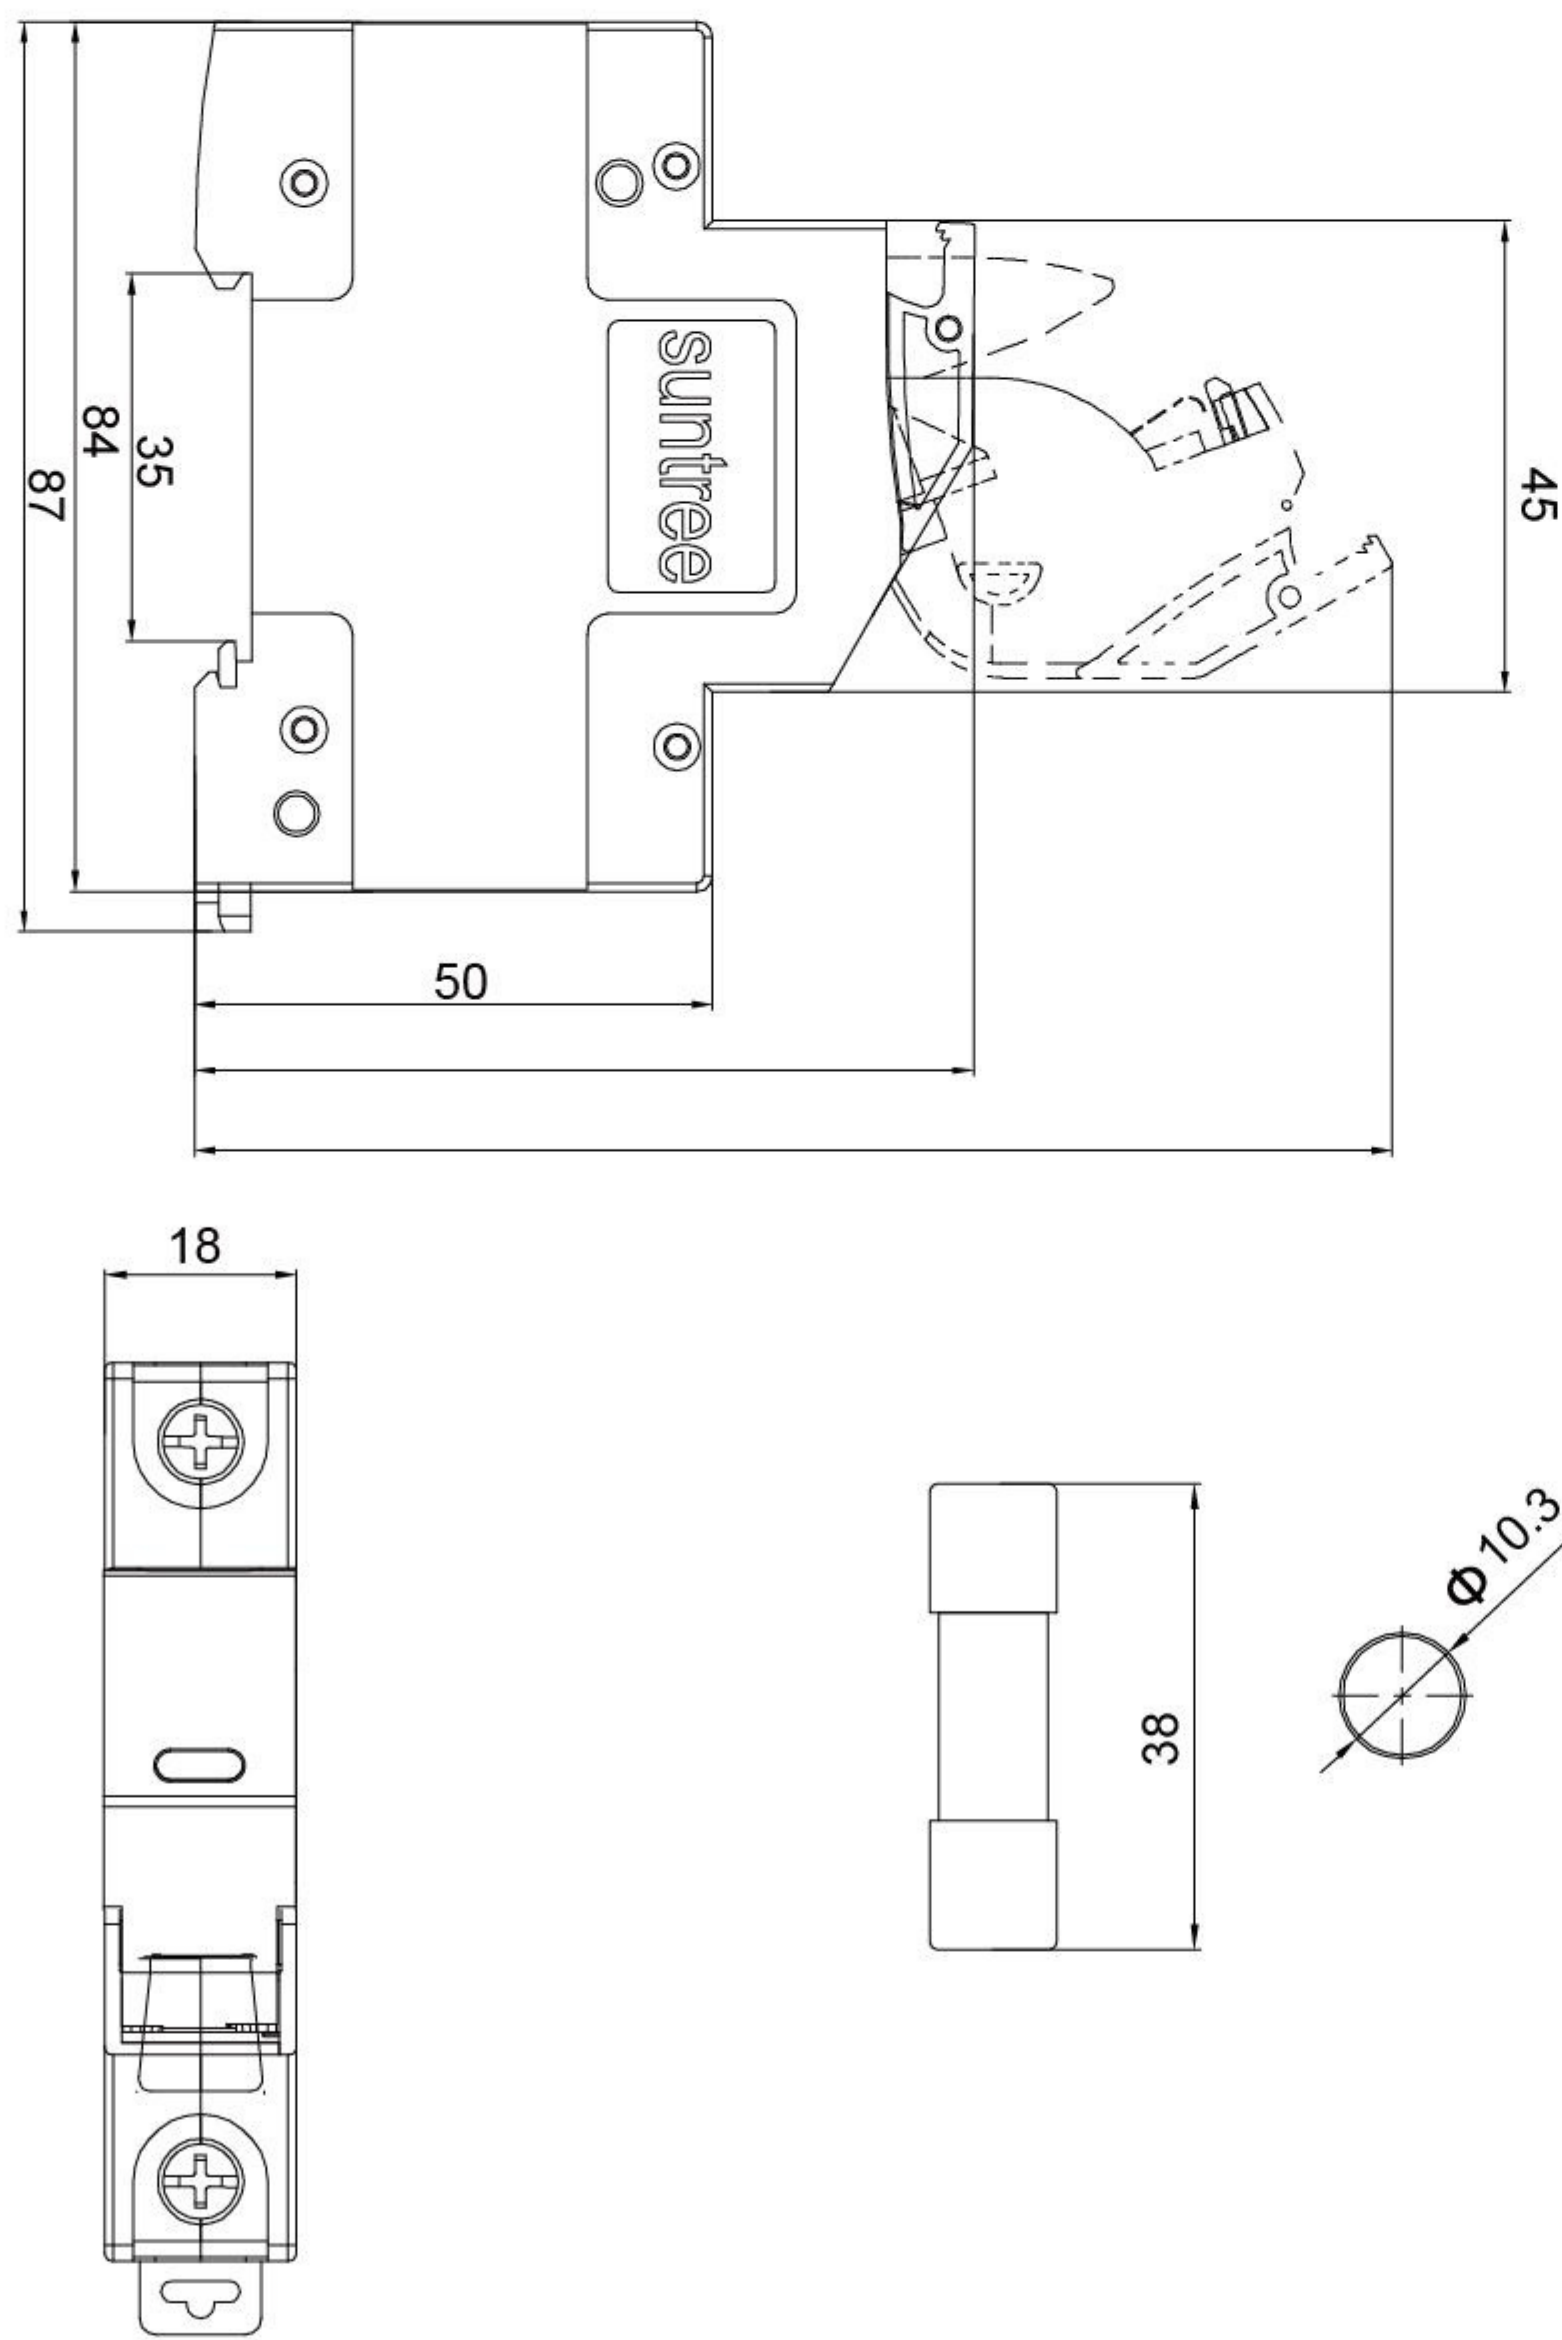

ELECTRICAL PARAMETERS

Product Model	SRD-30(Fused switch-disconnector)	
Normative references	IEC/EN60947-1 IEC/EN 60947-3	
Rated insulation voltage (Ui)	1200V	
Rated operational voltage (Ue)	DC1100V	
Rated operating current (Ie)	1A-30A	
Impulse withstands voltage (Uimp)	6kV	
Rated accepted dissipative power	≤4W	
Number of Poles	1P	
Rated limited short-circuit current	30kA	
Matched fuse size	φ10×38mm	
Protection class	IP20	
Use category:	PV-0	
Installation Method	35mm DIN rail	
Wiring capacity	1-10mm²	
Wiring screw/Terminal block torque	M5/1.8-2.3N.m	
Stripped wire length	13mm	
Product Model	SRF-30(Fuse Link)	
Normative references	EN60269-1 EN 60269-6	
Rated operational voltage (Ue)	DC1000v	
Rated operating current (Ie)	6A、 8A、 10A、 12A、 15A、 16A、 20A、 25A、 30A、 32A	
Rated accepted dissipative power	≤4W	
Rated limited short-circuit current	20KA	
Matched fuse size	φ10×38mm	
Use category	PV-0	



CONFORMSTO STANDARD

IEC/EN 60947-1 Low-voltage switchgear and control gear Part 1 General.

IEC/EN60947-3 Low-voltage switchgear and control gear Part 3: Switches, disconnectors, switch-disconnectors and fuse-combination units.


TRANSPORTATION AND STORAGE CONDITIONS

Temperatures between -25°C and +55°C, up to +70°C for a short period of time (within 24h);


The relative humidity of the air should not exceed 95% at a temperature of 25°C;

During transportation, the product should be handled with care, not inverted, and protected from strong impacts as well as rain and snow.

DERATING CURVE

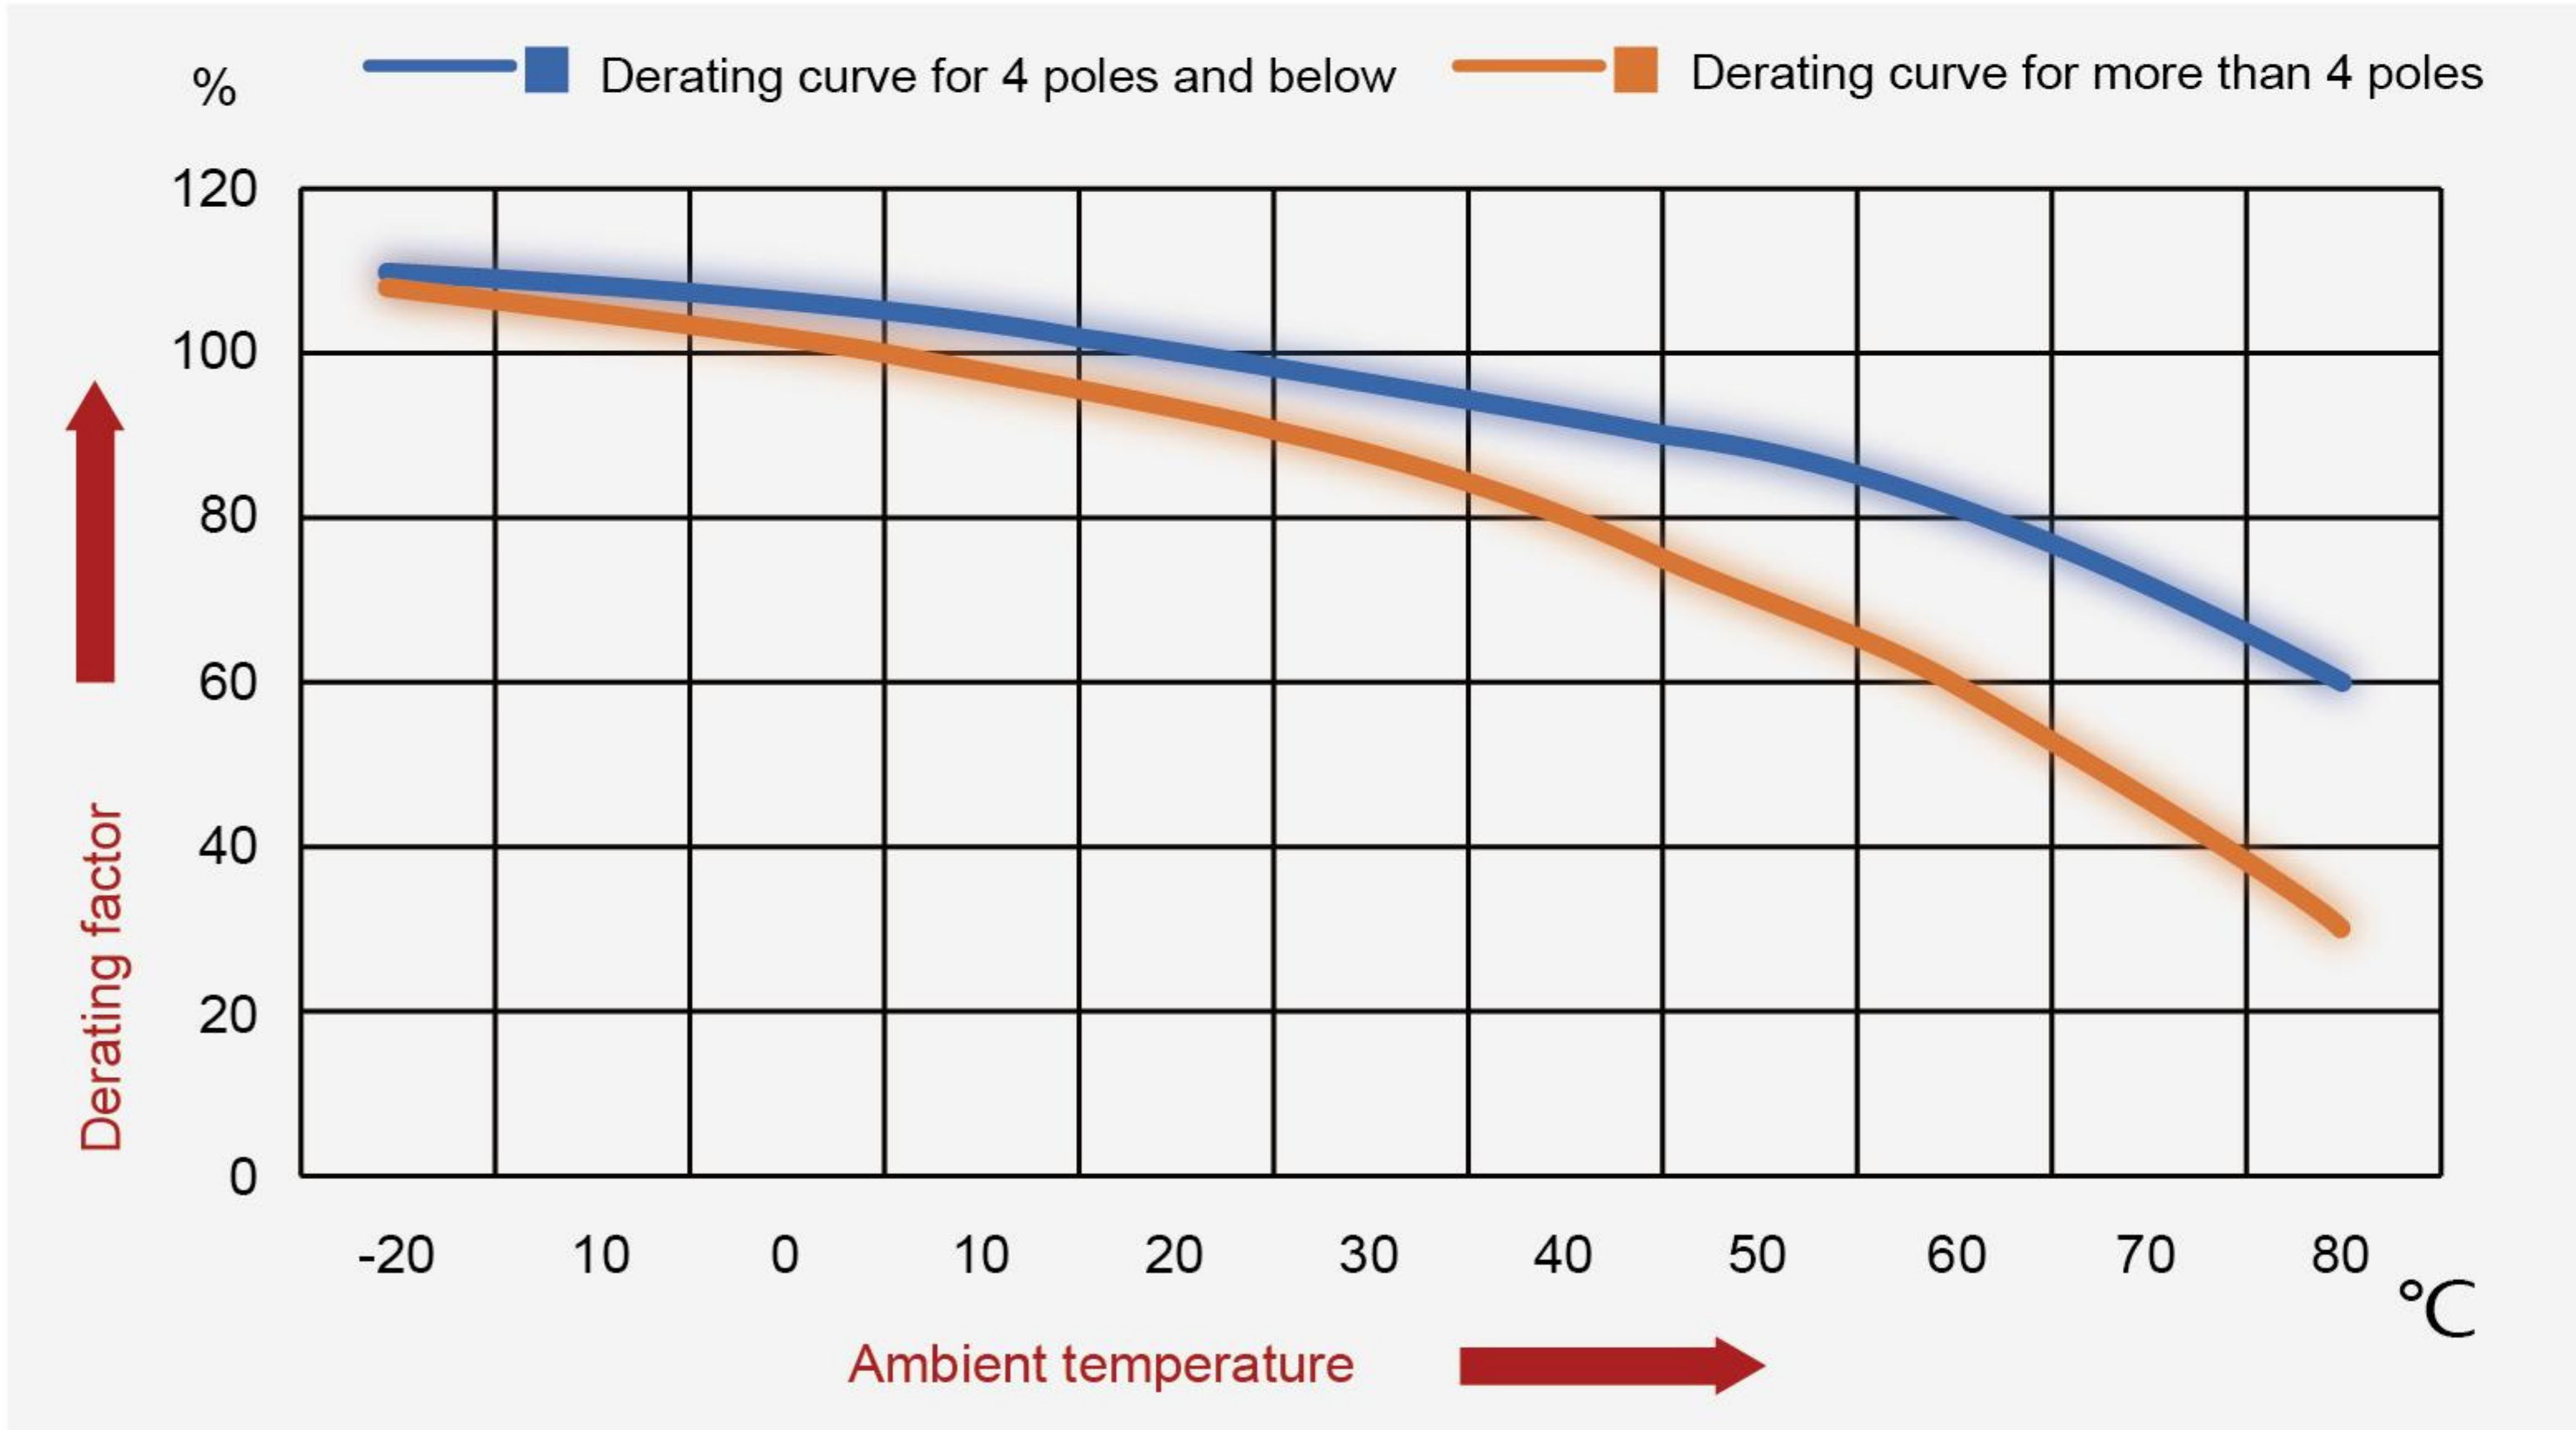

CHARACTERISTIC CURVE

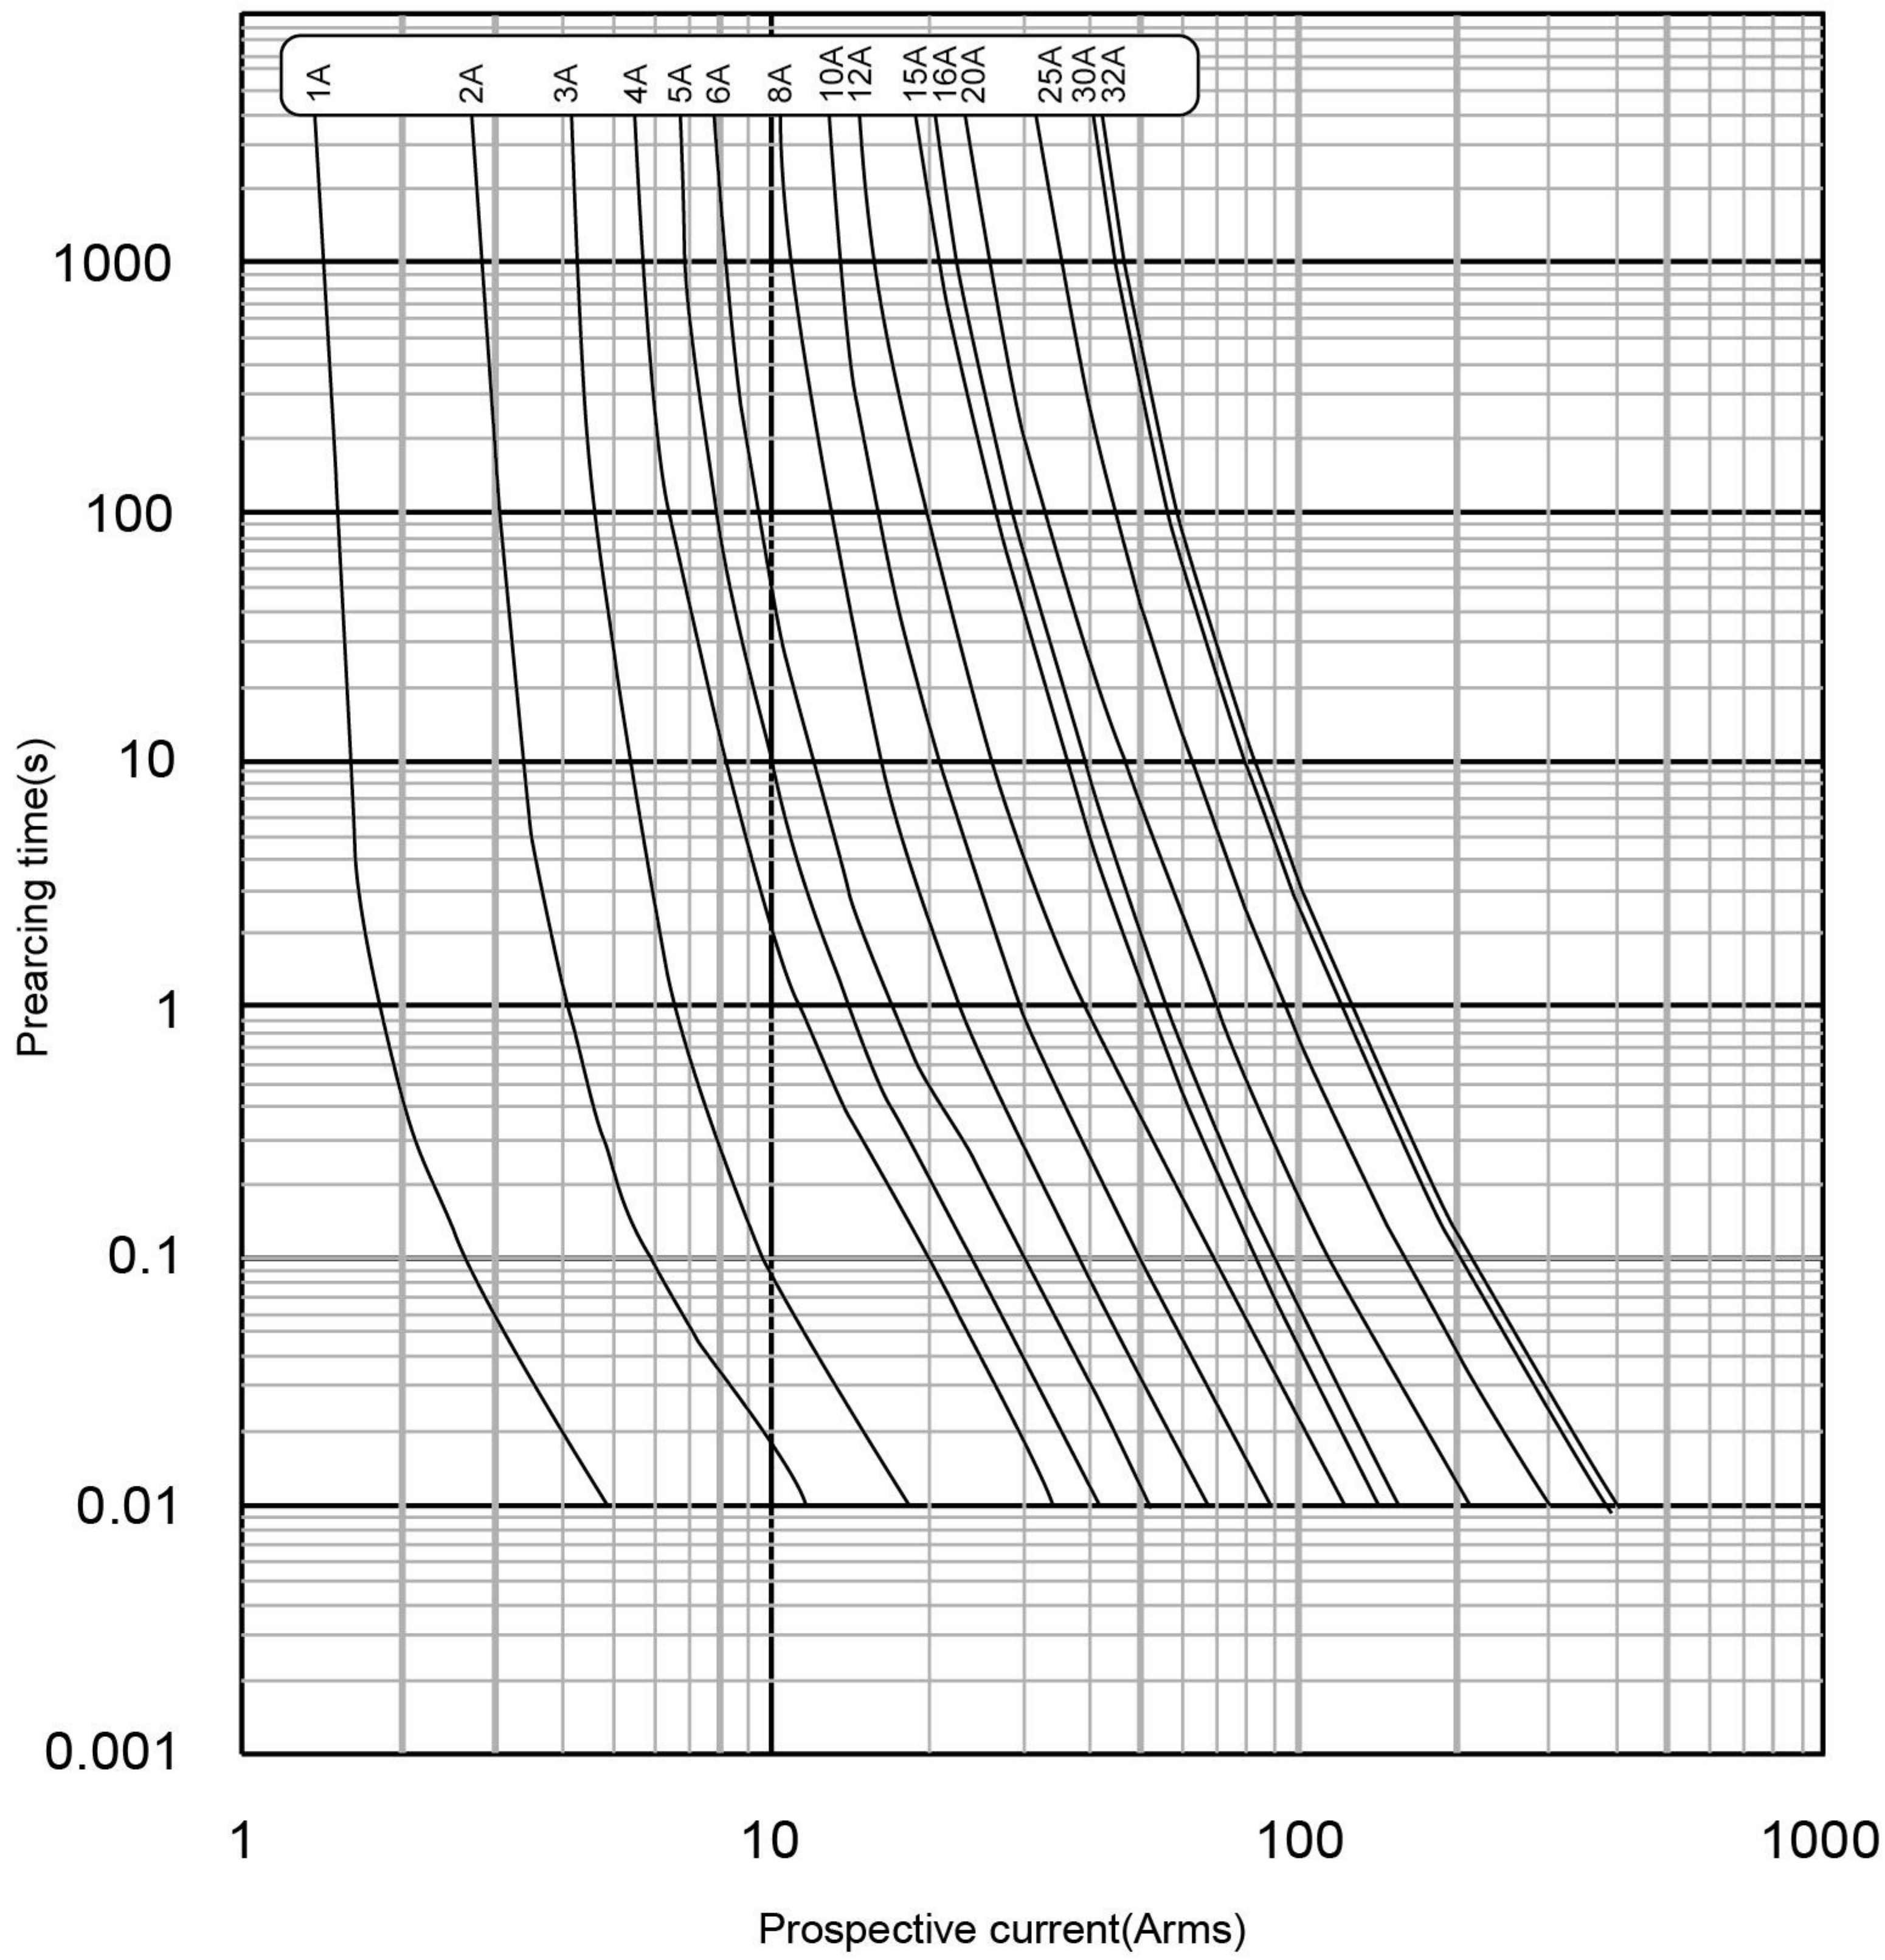

SRD-50H

PHOTOVOLTAIC FUSE SERIES




PRODUCT ADVANTAGES

- Suitable for protection of electrical installations against [short-current] and Over current.
- Plug-in design.
- Indicator window design.
- The current-carrying parts are all made of copper, low temperature rise.
- Unique shape and high recognition.
- The whole machine can pass the salt spray test with in 48 hours.

GENERAL PARAMETERS

S	RD	50	H
Enterprise code	Design Number	Current shell frame	High Voltage

DIMENSION (MM)

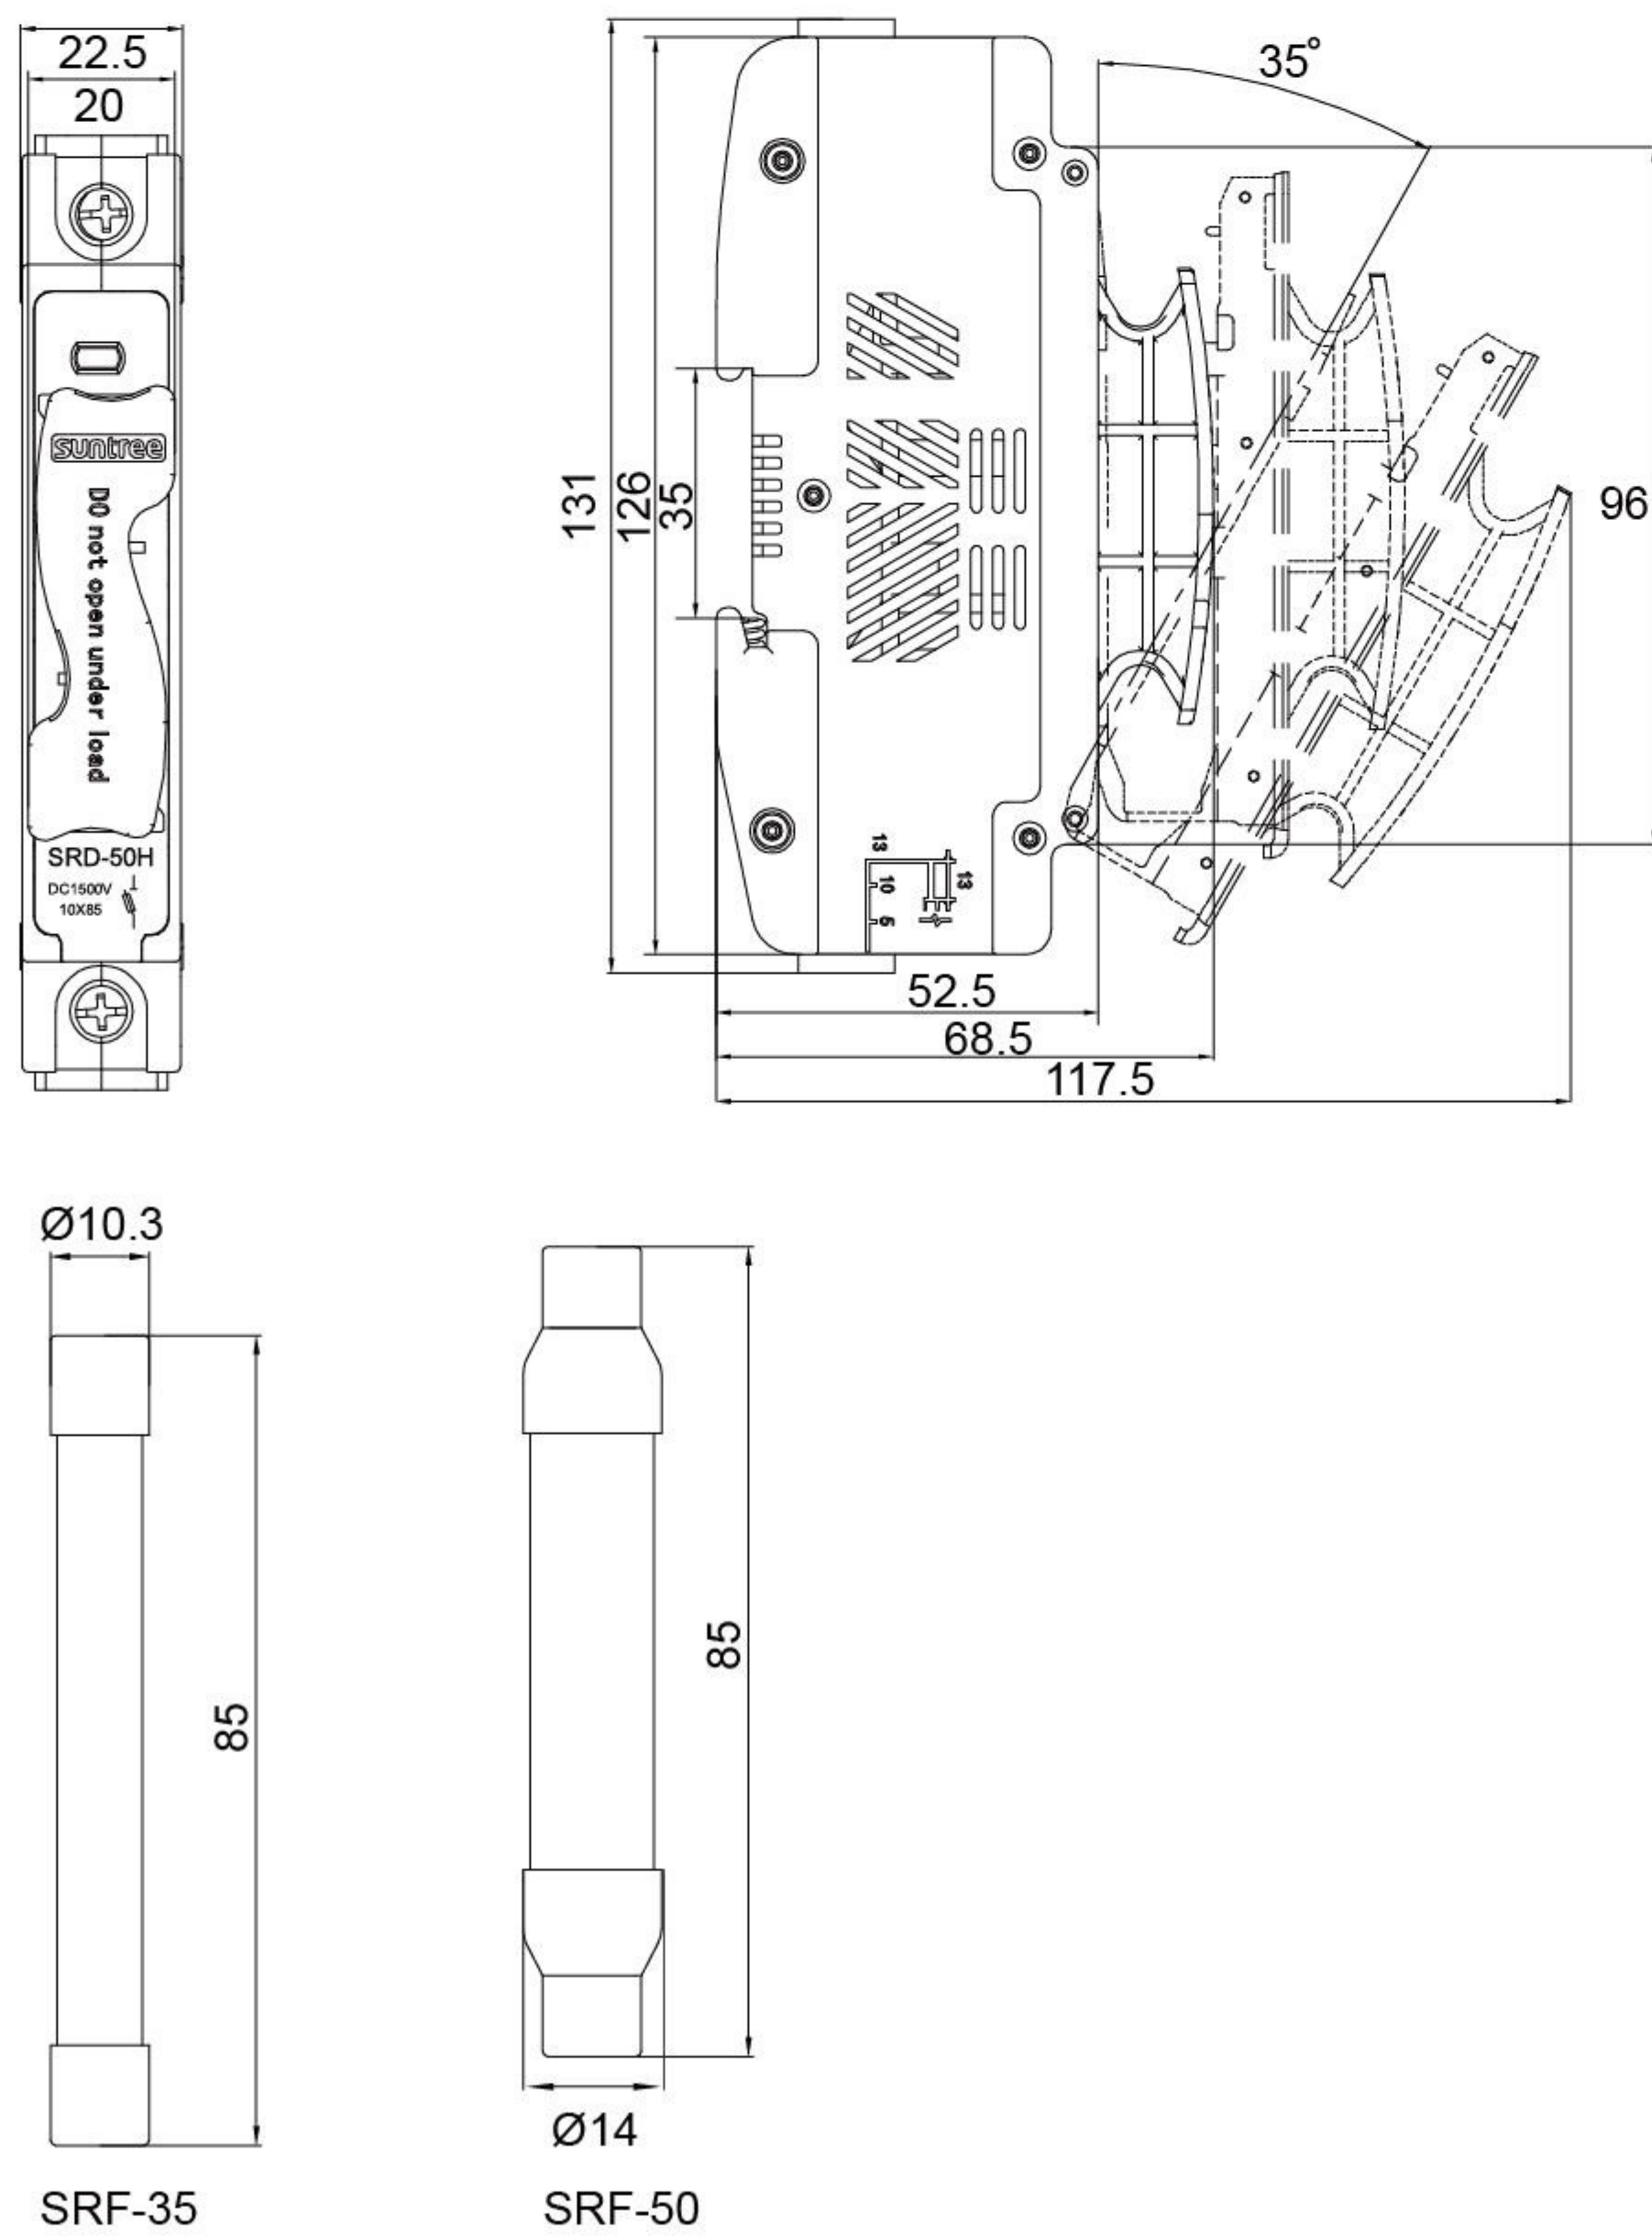

ELECTRICAL PARAMETERS

Product Model	SRD-50H
Pole	1P
Rated Operational Voltage/Ue(V)	1500VDC
Rated Operational Current/In(A)	2A、 3A、 4A、 5A、 6A、 8A、 10A、 12A、 15A、 16A、 20A、 25A、 30A、 32A、 40A、 50A
Ultimate Breaking Capacity/Icu(kA)	20kA
Rated Breaking Capacity/Ics(kA)	20kA
Max. Impulse Current/Iimp(A)	20kA
Fire-retardant Enclosure Level	V0
Device Width x Height (mm)	131*22*94.5
Method of Mounting	DIN RAIL
Mounting	Easy installed and fastening onto 35mm device rail(DIN)
Terminal Capacity	25mm²
Fastening Torque of Terminals	3N
Location	Indoor or in the Water-proof Box
Ambient Temperture	-40 C To 85℃
Altitude	≤2000m
Relative Humidity	90%
Pollution Level	2
Installation Class	II / III

GENERAL PARAMETERS

- S
Enterprise code
- RF
Design Number
- Case grade rated current
- H
High Voltage

INSTALLATION DIAGRAM AND DIMENSIONS(MM)



ELECTRICAL PARAMETERS

Product Model	SRF-35H	SRF-50H
Rated voltage	1500VDC	1500VDC
Rated working current	1/2/3/4/5/6/8/10/12/15/20/25/30/32/35A	15/20/25/30/32/35/40/45/50A
Rated accepted power dissipation	6W	12W
Size	10mm×85mm	14mm×85mm
Rated ultimate short circuit breaking capacity	20kA	20kA
Reference Standard	EN 60269-1 EN 60269-6	EN 60269-1 EN 60269-6
Protection level	IP20	IP20
Use category	PV—0	PV—0

PHOTOVOLTAIC FUSE LINK CURVE

